






3617 | linebox25  
120\_240




1.200mm	
3617 120 2 DR	2.700°K
3617 120 3 DR	3.000°K
3617 120 4 DR	4.000°K

1.200mm	
3617 120 2 DO	2.700°K
3617 120 3 DO	3.000°K
3617 120 4 DO	4.000°K

2.400mm	
3617 240 2 DR	2.700°K
3617 240 3 DR	3.000°K
3617 240 4 DR	4.000°K

2.400mm	
3617 240 2 DO	2.700°K
3617 240 3 DO	3.000°K
3617 240 4 DO	4.000°K

2.400mm (encendido común)	
3617 240 2 DI	2.700°K
3617 240 3 DI	3.000°K
3617 240 4 DI	4.000°K

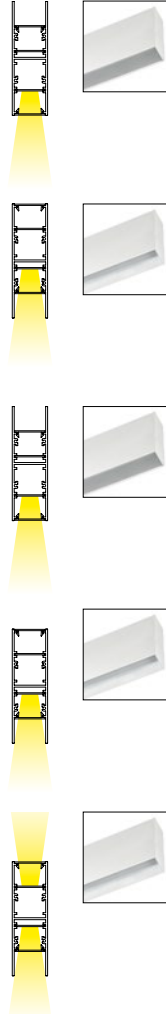

colores\_colors

1	3	8
---	---	---

materiales\_materials  
aluminio  
aluminium

En las versiones DI (luz directa e indirecta), el encendido es común.

Para versiones regulables o DALI, el driver debe ir ubicado en el falso techo. Las versiones no regulables llevan el driver oculto en el interior del perfil.

